

STONECREST® TILE

STEEL SHINGLE

PRODUCT DATA



Manufactured in Joplin, MO

METALWORKS® STONECREST® TILE Steel Shingles create the distinctive look of smooth, uniform tile. For those who appreciate a classic, refined appearance, these shingles provide outstanding performance and value.

USES

For application to roof decks with inclines not less than 3 inches per foot and up to mansard or side-wall application. For slopes between 3 and 4 inches per foot, TW Metal & Tile Underlayment or TW Underlayment must be used over entire deck area.

ADVANTAGES

- Backed by a 50 Year Limited Product Warranty, 25 Year Full Start Period, Limited Transferability, a 30 Year Finish Limited Warranty, and a 50 Year Limited Wind Warranty against damage from winds up to 110 mph.*
- Galva-Strength G-90 steel construction.
- Special coating process resists dirt and environmental aging. Fluoropolymer coating system from The Valspar® Corporation with Kynar® 500/Hylar 5000® coating.
- Lightweight compared to traditional roofing products.
- Resists fading and chalking.
- Fire resistant for added protection.**
- Can be applied over existing asphalt shingles eliminating disposal cost and mess.***
- Four-way locking system for enhanced performance.

*For information regarding or a copy of TAMKO's limited warranty, contact your local TAMKO representative, visit us online at www.tamko.com, or call us at 800-641-4691.

**Contact TAMKO or Underwriters Laboratories for specific application requirements for U.L. Class A rated systems.

***Check your Local Building Code. Building Code restrictions may apply.

COLORS

StoneCrest Tile Colors:

•Quaker Green

•Sierra Slate Grey

•Vermont Blue

CERTIFICATION/ REPORTS


Listed by UL for:
Class A Fire Rating**
Wind Resistance
Impact Resistance, Class 4
ICC-ES ESR-1129
Accepted for Use, City of New York, Department of Buildings MEA 156-00-M Vol II
CCMC 13011-R

Tested in compliance with:
UL 790
ASTM D 3161, Class F (110 MPH)
UL 2218

PRODUCT DATA†

Shingle Size: 12-5/8" x 39-3/4"
Exposure: 12"
Coverage per Box: 49.2 sq ft
(approx. 1/2 sq)

Shingles per Box: 15
Shingles per Square: 30
Weight per Shingle: 2.5 lbs
Weight per Square: 74 lbs

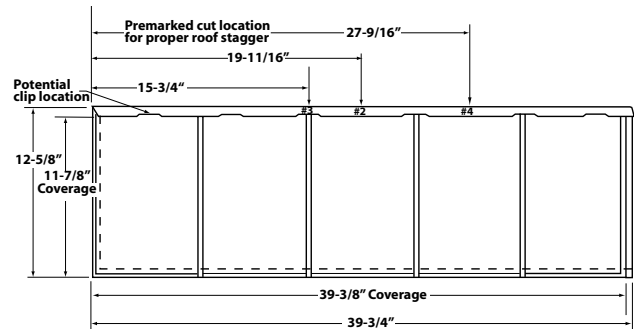

Shingle material: Nominal 0.0162" thickness, including G-90 galvanization and paint coatings.
Exterior finish: Fluoropolymer (PVDF) with anti-corrosive primer, 1 mil dry film thickness.
Interior finish: Wash coat with anti-corrosive primer, 0.6 mil dry film thickness.
Clip: 1-1/4" wide x 2-1/8" long x 1/5" deep
Clip Material: 0.015" thick, G-90 galvanized steel

Refer to Accessory Product Data Sheet for more information.



†All values stated as nominal

Visit our Web Site at www.tamko.com or www.metalworksroof.com

08/10/2006

Central District	220 West 4th St., Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr., Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St., Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp., Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave., Denver, CO	80216	800-530-8868

METALWORKS, StoneCrest and TAMKO are registered trademarks of TAMKO Building Products, Inc. Fluoropon® and Valspar® are registered trademarks of The Valspar Corporation, Inc. Kynar® is a registered trademark of Arkema, Inc. Hylar 5000® is a registered trademark of Solvay Solexis, Inc.

© 2006 TAMKO Building Products, Inc.
JP53132



997803